


2013 & Newer Explorer Police Utility Interceptor Deluxe Console with Plate Mounting Instructions

Thank you for purchasing one of our finest designed and made in U.S.A. kits.

Note there are subtle differences across these years; the following instructions are general references only. Your console comes as a complete sub assembly. It requires some disassembly of the lower center dash area to access the two front bolts. It uses the factory rear plate mounting bracket and the factory U-Nuts may have been removed during previous upfitting and missing. Two replacements are provided for your convenience, if needed. See the instructions below for more information.

Technical Note: Console Design and Installation - Restraints Control Module (RCM)

The RCM is mounted on the center tunnel floor under the factory equipment plate bracket.

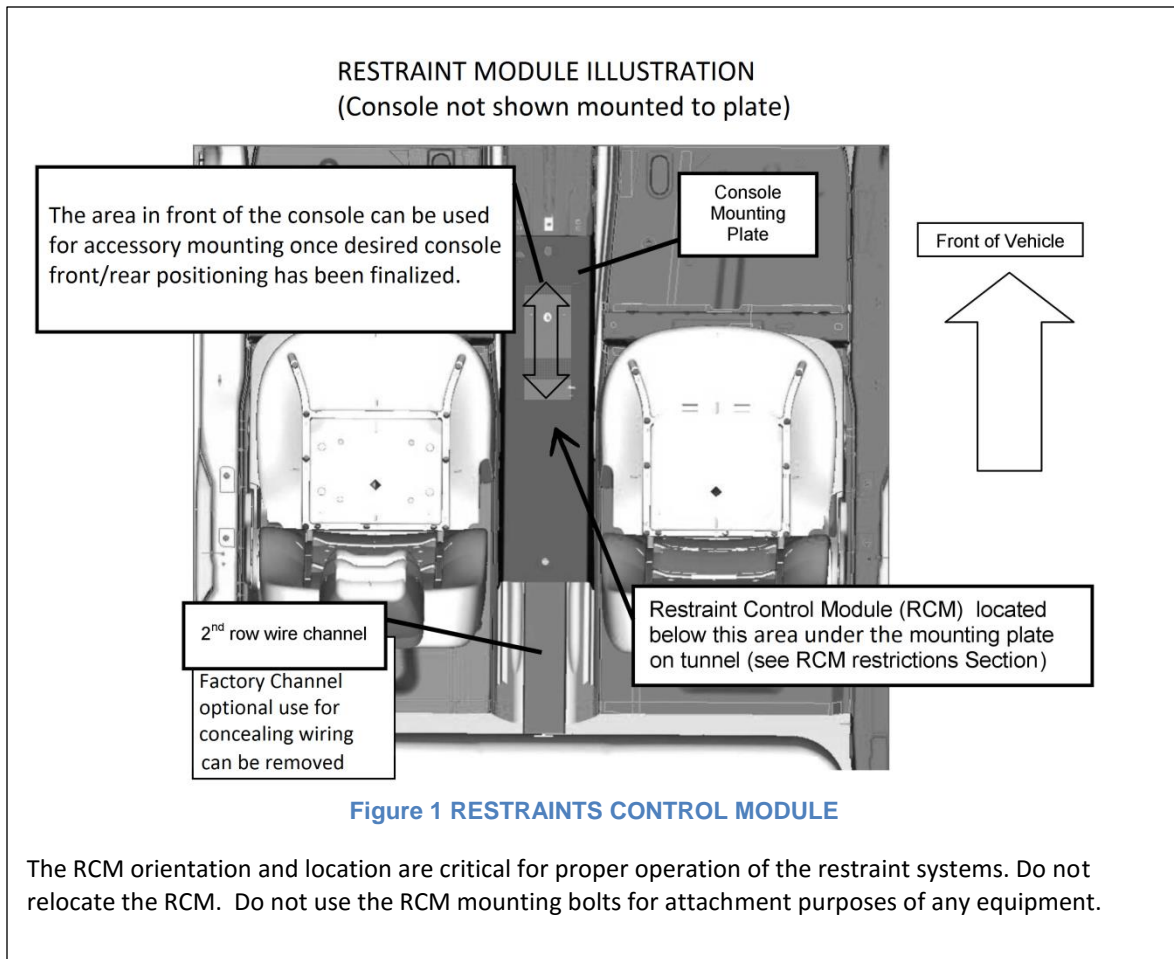



2013 & Newer Explorer Police Utility Interceptor Deluxe Console with Plate Mounting Instructions

Contents:

Description		Included
Console and Plate Assembly		1 ea
Hardware Kit	U-Nut 6-1.0mm	2 ea
	Front Flange Bolt 6-1.00 X 20mm	2 ea
	Rear Flange Bolt 6-1.00 X 45mm	2 ea
	Fender Washer (use with 45mm)	2 ea

If your vehicle has the factory bracket it will need to be removed and replaced with the plate in this kit.

Factory Plate Removal Instructions:

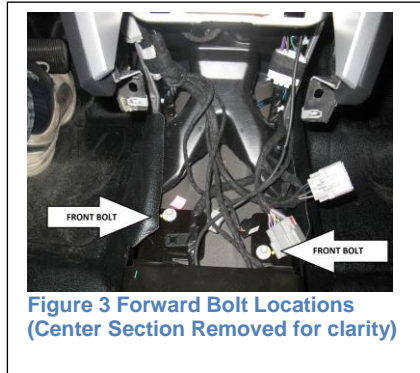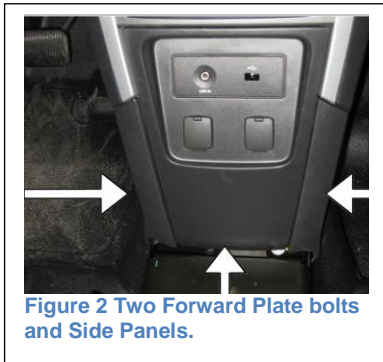

- 1) Remove Factory Floor Plate by removing 2 front bolts located under the center dash (Figure 2). Remove the lower dash factory side panels if they are present. Remove the screws holding them in place and remove the panels.


If you are not able to access the screws, remove the center section in Figure 2 by removing the bolts on the sides as shown in Figure 4 to more easily access the front plate bolts. Figure 3 shows the center section removed to reveal the two front plate bolt locations. If you have difficulty accessing the bolt heads, remove the center section as shown in figure 4 and gently tug the panel from the dash. You can leave the wiring attached since you only need to gain access the plate bolts and re-attach when done.

- 2) Remove the 2 middle bolts inside the circular cutouts on top of the plate and 2 horizontal bolts on the back side of the plate.
- 3) Remove the two rear mounting bolts on the sides of the plate.
- 4) Remove the factory mounting plate from the vehicle by lifting it rearward along at a 45 degree angle.

2013 & Newer Explorer Police Utility Interceptor Deluxe Console with Plate Mounting Instructions

Install the Nenno Console and Plate Assembly:

- 1) Verify that the factory rear mounting bracket has two U-Nuts, one on the left, and one on the right side. See Figure 5 for the location. If either one of these nuts is missing, or the threads are damaged, replacements are included in your hardware kit.
- 2) Guide the Console and Plate in place on a 45 degree angle, front bracket downward into position so that the front mounting holes align with the holes in the floor.
- 3) Thread the front two bolts in place by a few thread turns by hand only, do not tighten yet.
- 4) Install the two rear attachment bolts by first placing a fender washer on each and insert them through the holes on each side. These bolts index into the U-Nuts in the rear bracket. Tighten bolts to 12 Nm. (The new console does not require the 2 bolts inside the middle section cutouts.)
- 5) You can now tighten the front bolts to 9.0 Nm.
- 6) Re-install the lower center dash panel if it was removed.
- 7) Re-attach the lower dash left and right side panels.
- 8) Installation is complete.

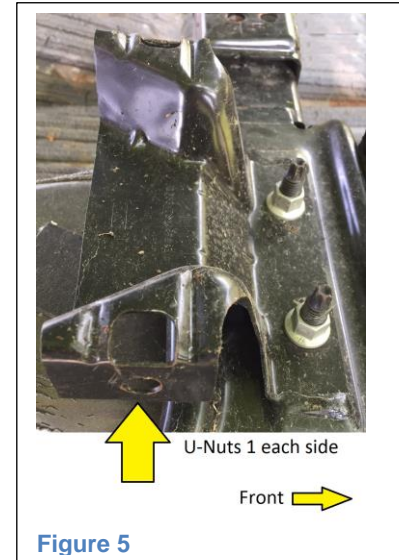

If you prefer that the console needs to be shifted forward toward the dash more, the mounting plate is slotted and there are cage nuts that allow forward repositioning. Here is how to adjust:

Remove the false bottom from the cargo compartment by pulling up on the strap. **(ALWAYS KEEP THE PULL STRAP ON THE TOP, removing it from the console will be very difficult if you don't have it to pull on the next time)** Using a long #3 Phillips screwdriver, begin to slightly loosen, do not remove, the 4 screws in the very bottom of the cargo compartment. Do not remove these screws or the threads will disengage from the cage nuts in the plate and it may become necessary to completely remove the console to re-attach them. Slide the console to the desired position and tighten the screws. Contact us for assistance with this if you have any questions.



Care & Maintenance-Any commercially available automotive interior cleaner will keep your vinyl looking great.

If you require technical assistance or have any questions, you can contact us at 262-305-4449 or info@nenno-products.com with any questions.



Nenno Products LLC
www.nenno-products.com